

RECHARGEABLE

INTRANT™ DUAL-LIGHT™ ANGLE LIGHT

NIGHTSTICK
Life Depends on Light™

45°
EXCLUSIVE
DOWNWARD FLOODLIGHT

HEAD ROTATES 90°



GRAB-N-GO
CHARGING BASE



Head rotates 90° - directing beam exactly where it's needed most



45° downward floodlight lights an 8 foot walking area



Easy-to-use with gloves, the large switches independently control separate LEDs



Heavy-duty, clip and V-ring securely holds tight to gear in any situation



AVAILABLE IN MULTIPLE COLORS.

FLY STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	7h	15h	27h
	401m	250m	187m
	40256cd	15625cd	8750cd

CERTIFIED
CE cULus LISTED Ex IECEx NFPA

200 LUMENS

1-800-233-2155 · 1-469-326-9400 · nightstick.com

© 2018 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates.

INTRANT™**DUAL-LIGHT™ ANGLE LIGHT****RECHARGEABLE****ITEM NUMBER/UPC**

XPR-5568RX (Red), 0 17398 80631 2
 XPR-5568GX (Green), 0 17398 80630 5

MARKET APPLICATIONS

Hazardous work environments, fire, rescue, industrial and automotive

CERTIFICATIONS

- CE, cULus, Atex, IECEx, NFPA

CASE MATERIAL

- Glass filled nylon polymer

LUMENS/RUNTIME**FLASHLIGHT**

- HIGH: 200L, 7 hrs. runtime
- MEDIUM: 110L, 15 hrs. runtime
- LOW: 60L, 27 hrs. runtime
- STROBE

FLOODLIGHT

- HIGH: 100L, 7 hrs. runtime
- MEDIUM: 40L, 15 hrs. runtime
- SURVIVAL: 20L, 27 hrs. runtime

DUAL-LIGHT

- 205L, 7 hrs. runtime

CANDELA**FLASHLIGHT**

- HIGH: 40,256
- MEDIUM: 15,625
- LOW: 8,750

BEAM DISTANCE**FLASHLIGHT**

- HIGH: 401m
- MEDIUM: 250m
- LOW: 187m

WATER RATING

- IP-67 (dustproof and waterproof)

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 6.6 in (168mm)
- WIDTH: 2.6 in (66mm)
- DEPTH: 2.6 in (66mm)
- BEZEL DIAMETER: 2.1 in (53mm)
- WEIGHT: 10.6 oz (301g)(with batteries)

BATTERY







- Rechargeable Li-ion battery pack
- AA Battery carrier (batteries not included)

WARRANTY


- Limited lifetime warranty

WHAT'S INCLUDED

- Angle light
- Rechargeable Li-ion battery pack
- AA battery carrier
- Snap-in rapid charger
- AC & DC power supplies
- Instruction manual

FL1 STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	7h	15h	27h
	401m	250m	187m
	40256cd	15625cd	8750cd
	2m		
	1m		

XPR-5568 PERFORMANCE CURVE

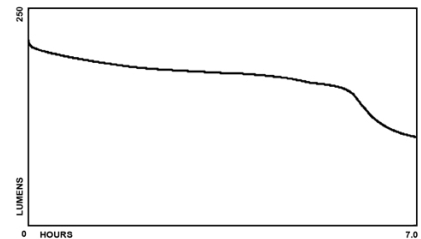

Bayco Products, Inc. XPR-5568
 640 S. Sanden Blvd., Wylie, TX 75098

Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

For use with Bayco Li-ion Battery Pack 5568-BATT or
 5568-CARRIER with 3 AA Energizer Type EN91 or E91
 batteries only



LISTED
 E 114304
 ID 4003544

ELECTRICAL SAFETY
 INTRINSICALLY SAFE
 SECURITE INTRINSEQUE

CE 0359
 Control Drawing: 5568-CERT-DWG-1-03

CLASS I DIV 1 GRPS A-D T3
 CLASS II & III DIV1 GRPS E-G T135°C
 CLASS I ZONE 0 AEx ia IIC T3 Ga

Ⓜ I M1 Ex ia op is I Ma
 Ⓜ II 1 G Ex ia op is IIC T3 Ga

Ex ia op is I Ma
 Ex ia op is IIC T3 Ga
 DEMKO 17 ATEX 1927
 IECEx UL 17.0082

-20°C ≤ Tamb ≤ +40°C
 1.5V/Cell Alkaline
 3.7V/Cell Li-ion

IP-67
 Um: 10V

CERTIFIED

NFPA

AVAILABLE IN MULTIPLE COLORS.

